




WEAKENED PLANE JOINT DETAIL

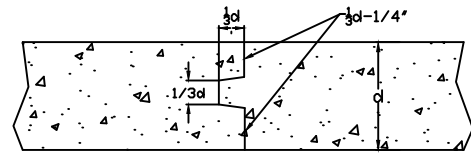

CONSTRUCTION JOINT DETAIL

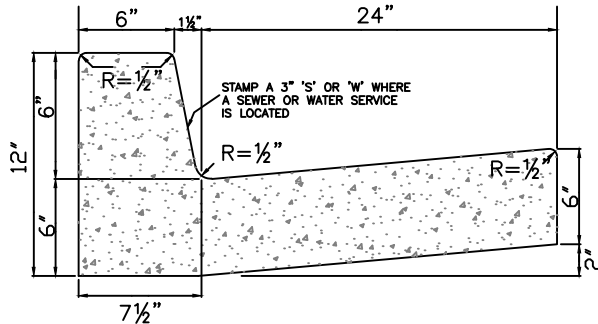


CROSS-SECTION OF MONOLITHIC CURB AND GUTTER

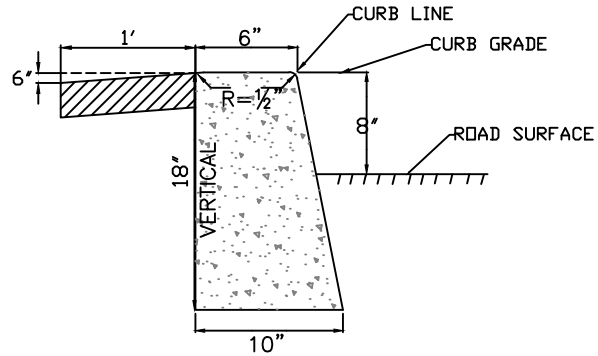


CROSS-SECTION OF CURB WITH WALKWAY

SEE STATE SPEC. 51-1.12C (PREMOLED EXPANSION JOINT FILLER)

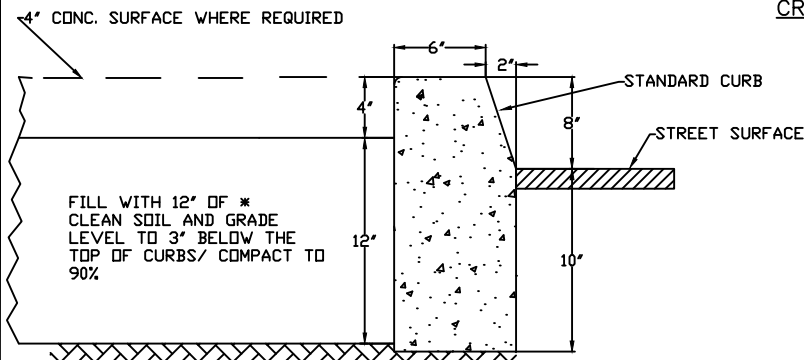


MEDIAN ISLAND CURB DETAIL WITH CONCRETE WALKWAY

*FILL BEFORE PLACING BASE MATERIAL OR COMPACTING IN THE TRAVELED WAY



EXPANSION JOINT DETAIL

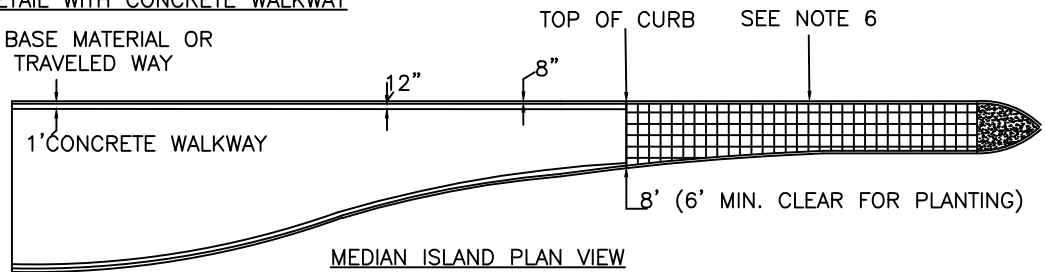

MEDIAN ISLAND PLAN VIEW

Notes:

1. TOP OF CURB TO BE TROWELED AND HAVE A LIGHT BRUSH FINISH. FACE OF CURB TO BE TROWELED AND HAVE A LIGHT BRUSH FINISH. GUTTER TO BE RUBBER FLOATED.
2. 1/4" TO 1/2" FELT EXPANSION JOINT TO BE PLACED AT A MAXIMUM OF 40 FEET AND ADDITIONAL DEEP SCORE JOINTS AT A MAXIMUM OF 20 FEET.
3. ALL WORK TO CONFORM TO SECTION 73 AND 90 CALTRANS STANDARD SPECIFICATIONS.
4. MIN GUTTER FLOW LINE S=0.0015
5. MIN GUTTER DROP AROUND CURB RETURNS IS 0.15 FEET, EXCEPT AT VALLEY GUTTERS.
6. MEDIAN ISLAND PATTERN: RUNNING-BOND BRICK/COLOR: BRICK RED. IMPRINTING TOOLS SHALL BE FURNISHED BY THE CONTRACTOR.

TYPICAL CURB AND CURB & GUTTER

REF. & REV.
MARCH 2005
FEB. 2011
AUG. 2015
SEPT. 2015

CITY OF MADERA

ST-12